



Part codes TRED30-7R, TRED30-7F

The LogTag® TRED30-7 Temperature Recorder measures and stores up to 7770 temperature readings over -40°C to +99°C (-40°F to +210°F) measurement range from a remote temperature probe.

Statistical temperature and duration readings for up to 30 days can be reviewed on the display.

The visual display of current temperature* and previous alarms is an important feature in “static” applications such as cool rooms and refrigerators. The display arrangement is designed to show ‘at a glance’ if temperature violations have occurred during the current day and up to the previous 29 days. The display also shows the current temperature reading, the current time, recording status and battery status.

Details of any excursions can be checked directly by inspecting the statistics history on the recorder’s display or in more detail by downloading the logged data via a standard LogTag® Interface cradle to LogTag® Analyzer.

If a reading outside the pre-set “Alarm” limits is recorded at any time, a “day alarm indicator” appears on the display.

Part code ST100S-xx

Part code ST100T-xx

Part code ST100H-xx

Accepts all LogTag® ST100 type remote temperature probes.

Highlights

Data logging

State Indicators

ALARM indicator

Day alarm summary

Current time & temperature

Review button

Start/Clear/Stop button

Flexible start options

Flexible recording options

Rapid Download!

Thin flat case

Real time clock

7770 recordings capacity

High Quality Connector

Interchangeable Probes

Records time and temperature data for later download

Display shows current state (READY, STARTING, RECORDING, PAUSED or STOPPED)

Appears on the display to show an alarm trigger has occurred.

Displays in calendar-like format alarm triggers for up to the last 30 days

Shows the current time and temperature when not in review mode

Allows review of current day and up to 29 previous days of statistical data and also adds an ‘inspection mark’ into the recordings log during recording.

Push button recording start, alarm clear and recording stop

(all configurable options)

Push button recording start with optional delayed start (up to 18 hours) or specific time & date start

Either record for a fixed time or record continuously with ‘wrap around logging’

Takes only seconds to download recordings.

Fits easily into packaging and thin enough to be easily mailed “letter rate”

Records time & temperature simultaneously

Enough memory for 53 days @ 10min logging or 80 days @ 15min logging

Gold plated remote sensor connector

LogTag® remote temperature ST100 probes are interchangeable.

STORAGE:


Store at +2°C e +8°C (in a refrigerator), protect from light.



*current temperature display is actually last logged temperature and is only updated when a log is taken.

Display

The normal *recording* display shows the current temperature reading*, the time and the alarm trigger day summary. A visual alarm trigger is displayed if one or more of the configured alarm trigger conditions have been met. An alarm trigger condition can be a single reading above the upper or below the lower threshold values, a set of consecutive violating readings or an accumulation of violation readings encountered.

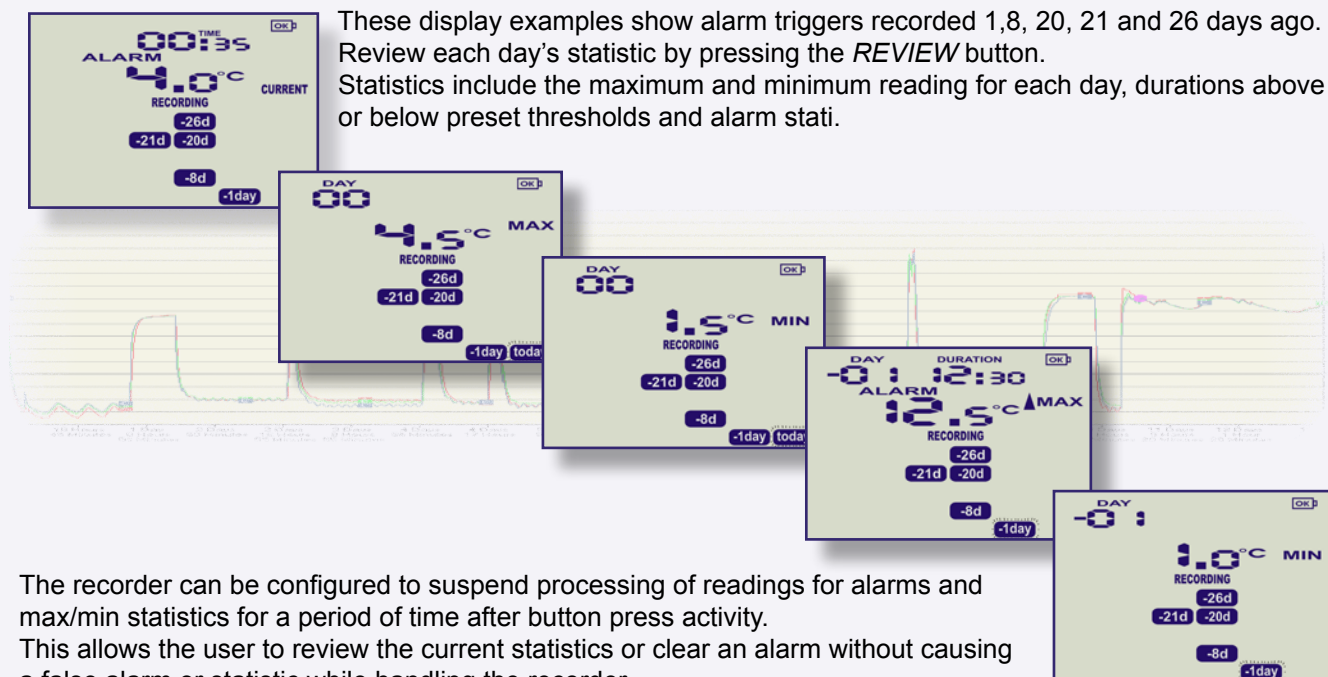

The recorder can be configured to suspend processing of readings for alarms and max/min statistics for a period of time after button press activity. This allows the user to review the current statistics or clear an alarm without causing a false alarm or statistic while handling the recorder.

Specifications

| | |
|---|---|
| LogTag® Part Codes | TRED30-7R : (replaceable battery) TRED30-7F : (fixed battery) |
| Measurement Temperature range with ST100 remote temperature probe | -40°C ~ +99°C (-40°F ~ +210°F) |
| Recorder operating temperature range | -30°C ~ +60°C (-22°F ~ +140°F) |
| Rated Temperature reading accuracy | Better than ±0.5°C (±0.9°F) for -20°C~+40°C (-4°F~+104°F) - typically ±0.3°C (0.6°F) Better than ±0.8°C (±1.4°F) for -40°C~-20°C (-40°F~ -4°F) - typically ±0.5°C (0.9°F) Better than ±0.8°C (±1.4°F) for +40°C~+70°C (+104°F~+158°F) - typically ±0.7°C (1.3°F) Better than ±1.2°C (±2.2°F) for +70°C~+99°C (+158°F~+210°F) - typically ±1°C (1.8°F). |
| Rated temperature resolution on LCD | 0.1°C(0.2°F) for measurements -40°C ~ +50°C (-40°F ~ +122°F) 0.2°C(0.4°F) for measurements +50°C ~ +70°C (+122°F ~ +158°F) 0.3°C(0.5°F) for measurements +70°C ~ +80°C (+158°F ~ +176°F) 0.4°C-0.6°C(0.7°F~1°F) for measurements +80°C~ +99°C (+176°F ~ +210°F) |
| Recording capacity | Data logging memory : 7770 logs - eg 53 days @ 10min logging, 80 days @ 15min logging Day summary statistics memory (for display on LCD): up for 30 days of Max/Min and duration values |
| Sampling Interval | configurable from 30 seconds to hourly |
| Logging Modes | Supports 'continuous' wrap around or specific recording period |
| Real time clock accuracy | Quartz crystal locked real time clock. Rated accuracy ±25ppm @ 25°C (equiv to 2.5 seconds/day) Rated temperature coefficient is -0.034±0.006ppm/°C (i.e typically +/- 0.00294seconds/day/°C) |
| Download time | typically less than 8 seconds for full memory |
| Power Source | 3V Lithium-Manganese Dioxide extended temperature chemistry |
| Battery Life | TRED30-7R : typically 1 year of operation TRED30-7F : typically 2+ years of operation |
| Size | 93.0mm(H)x54.5mm(W)x8.6mm(T) (without temperature probe) |
| Weight without temperature probe | TRED30-7R : 41grams TRED30-7F : 44grams |
| Case Material | Polycarbonate |
| EMC Compliance | Complies with EC EMC directives (EN 61000-6-3:2006 & EN 61000-6-1:2005) Complies with FCC Part 15 Subparts A and B. |
| Environmental | IP61 (when vertically mounted or hung) |
| FDA 21CFR Part 11 Compliance | Designed to comply with FDA 21CFR Part 11 (Digital signatures) |
| Reader interface | Standard LogTag Interface cradle |
| Remote Temperature probes | Standard LogTag® ST100 temperature probes (Standard lengths 1.5m (4'11") or 3m (9'10")) |
| | Manufactured to meet the European RoHS Directive |